
Data sheet
634 PUC-K160 BR

Fixed castor - mounting type: top plate (4 bolt holes).

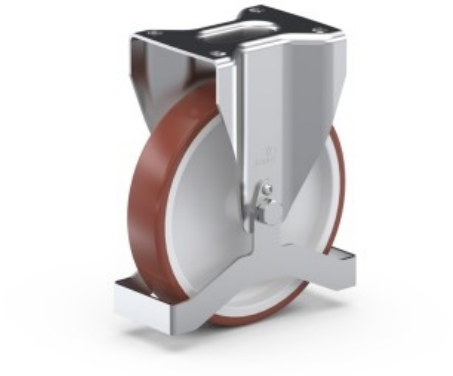

VYROBENÉ
NA SLOVENSKU
MADE IN SLOVAKIA

The series model 634 PUC BR predstavuje fixed rolovacie castor with konštrukčným solution založeným na montážnej doske na four otvory, which allows simple and bezpečnú installation. Wheel centre is made z durable material, which v kombinácii with termoplastickým elastomérovým behúňom ensures quiet and non-marking operation, ideálny for interiérové applications. Use klzného bearing ensures maintenance-free operation and long service life, while the zinc-plated vidlica increases durability against corrosion. Toto castor is suitable for various industrial and komerčné prostredia, where important reliability and gentleness k povrchom, napríklad v skladoch, workshops alebo kanceláriách.

TREAD AND TYRE HARDNESS	98° ± 2° Shore A	●●●●○
ROLLING RESISTANCE	very good	●●●●○
OPERATING NOISE	good	●●●○○
WEAR RESISTANCE	very good	●●●●○
TEMPERATURE RANGE	od -30 °C do +70 °C	

Specifications

Diameter (D)	160 mm
Wheel width (S)	40 mm
Plate size (A x B)	135 x 110 mm
Bolt hole spacing (a x b)	105 x 80/75 mm
Bolt holes Ø	11 mm
Mounting height(H)	200 mm
Load	500 kg
Bearing type	Klzné
Mounting type	Mounting bracket
Tread material	Polyuretán
Attributes	Non-marking
Farba behúňa	Hnedá
Wheel centre colour	Prírodná biela
Wheel centre	Polyamide

When choosing the right wheel, please note the technical conditions and step-by-step guide in our catalogue (p. 4-17) or visit our website https://sk.renost.net/en/. Note: Load capacity refers to dynamic load according to STN EN 12532 (speed: 4 km/h, height of obstacles = 2,5% of the wheel diameter for tread hardness ≥ 90° Shore; height of obstacles = 5,0% of the wheel diameter for tread hardness < 90° Shore; temperature 17°C-23°C; humidity= 40%-70%).