
Data sheet
CAZ-G082-50/20 /6204 ZV 14-17/

Wheel.

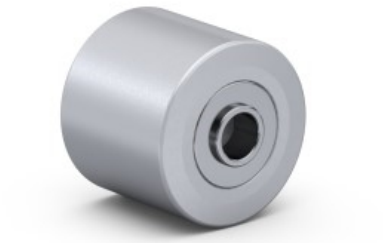

VYROBENÉ
NA SLOVENSKU
MADE IN SLOVAKIA

The series model CAZ predstavuje samostatné wheel with konštrukčným solution založeným na hliníkovej liatine wheel centre, which guarantees high strength and durability. Thanks to the use of dvoch radiálnych guličkových ložísk with krytmi ensures maintenance-free operation and smooth movement without potreby pravidelného mazania. An ideal choice for čisté hladké floor and vedenia, such as aj for mierne znečistené surfaces šponami and oils, where si zachováva reliable výkon. Kombinácia durable material and high-quality bearing ensures long service life and quiet operation v various industrial and komerčných environments.

Wheel CAZ series:

- die-cast aluminium

Použitie:

- clean, even floors and lines or floors soiled with metal chips and oil

Bearing - ball:

- two radial ball bearing with sealing covers

TREAD AND TYRE HARDNESS	180 – 220 HB	●●●●●
ROLLING RESISTANCE	excellent	●●●●●
OPERATING NOISE	sufficient	●○○○○
WEAR RESISTANCE	excellent	●●●●●
TEMPERATURE RANGE	from -20 °C to +120 °C	

Specifications

Diameter (D)		82 mm
Wheel width (S)		50 mm
Mounting height(H)		82 mm
Bearing type		Ball
Tread material		Kov
Wheel centre colour		Hliníková
Wheel centre		Hliníková liatina

When choosing the right wheel, please note the technical conditions and step-by-step guide in our catalogue (p. 4-17) or visit our website https://sk.renost.net/en/. Note: Load capacity refers to dynamic load according to STN EN 12532 (speed: 4 km/h, height of obstacles = 2,5% of the wheel diameter for tread hardness ≥ 90° Shore; height of obstacles = 5,0% of the wheel diameter for tread hardness < 90° Shore; temperature 17°C-23°C; humidity= 40%-70%).