
Data sheet
CAZ-G082-70/20 /6204 ZV 14-17/

Wheel.

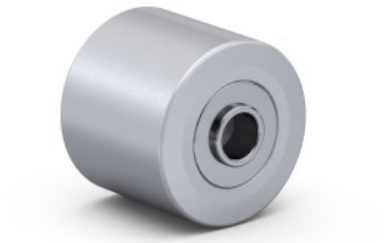

VYROBENÉ
NA SLOVENSKU
MADE IN SLOVAKIA

The series model CAZ predstavuje samostatné wheel with hliníkovou liatinou wheel centre, which v kombinácii with ball bearing provides high load capacity and long service life. The design includes dve radiálne ball bearings with krytmi, which ensures maintenance-free operation and quiet operation. Thanks to the use of high-quality material is wheel suitable for čisté hladké floor and vedenia, such as aj for mierne znečistené surfaces šponami and oils, which z neho robí univerzálnu voľbu for various industrial and skladové applications. An ideal choice for prostredia, where important durability and reliability during zachovaní šetrnosti k podlahe.

Wheel CAZ series:

- die-cast aluminium

Použitie:

- clean, even floors and lines or floors soiled with metal chips and oil

Bearing - ball:

- two radial ball bearing with sealing covers

TREAD AND TYRE HARDNESS	180 – 220 HB	●●●●●
ROLLING RESISTANCE	excellent	●●●●●
OPERATING NOISE	sufficient	●○○○○
WEAR RESISTANCE	excellent	●●●●●
TEMPERATURE RANGE	from -20 °C to +120 °C	

Specifications

Diameter (D)	82 mm
Wheel width (S)	70 mm
Mounting height(H)	82 mm
Load	1300 kg
Vnútorný priemer náboja (d)	20 mm
Dĺžka náboja (L)	70 mm
Bearing type	Ball
Tread material	Kov
Wheel centre colour	Hliníková
Wheel centre	Hliníková liatina

When choosing the right wheel, please note the technical conditions and step-by-step guide in our catalogue (p. 4-17) or visit our website https://sk.renost.net/en/. Note: Load capacity refers to dynamic load according to STN EN 12532 (speed: 4 km/h, height of obstacles = 2,5% of the wheel diameter for tread hardness ≥ 90° Shore; height of obstacles = 5,0% of the wheel diameter for tread hardness < 90° Shore; temperature 17°C-23°C; humidity= 40%-70%).